


TRICOLOR LED FLUSHMOUNT

LED-55DLP
LED-7DLP
LED-9DLP



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO
PERSONS READ ALL INSTRUCTIONS
**IMPORTANT SAFETY
INSTRUCTIONS**
SAVE THESE INSTRUCTIONS

TOOLS AND MATERIALS REQUIRED:



Phillips
Screwdriver



Wire Cutters



Pliers


Wiring supplies
as required by
local electrical
code

SAFETY PRECAUTIONS:

1. **TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.**
2. **THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A CERTIFIED ELECTRICIAN FAMILIAR WITH LOCAL MUNICIPAL CODES AND REQUIREMENTS.**
3. **CAUTION – RISK OF ELECTRIC SHOCK. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.**

PACKAGE CONTENTS


PART	DESCRIPTION	QTY
A	LED disc light	1
B	Mounting screws	2
C	Wire nut	3
D	Mounting plate	1

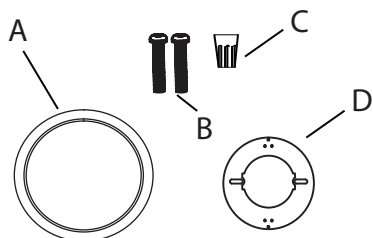


FLUSH MOUNT

This LED light is compatible to be dimmed by
LUTRON# DVCL-153P, MACL-153MH, CTCL-153P,
TGCL-153P
LEVITON# 6631, 6633, 6633-P, 6672, 6674, IPL06
Dimming levels may vary by different dimmer.


Electrical junction box

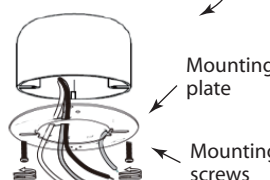


Mounting plate
Mounting screws

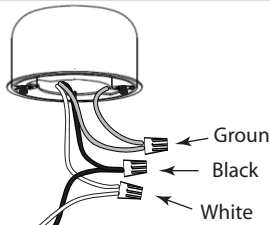

Ground
Black
White

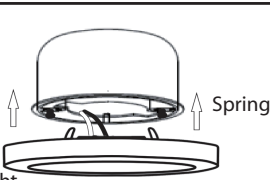

Spring
Disc light

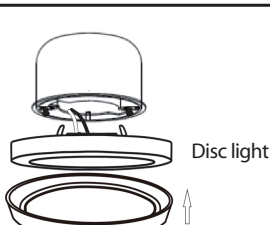

Disc light
BN/BK Trim ring (sold separately)

1. Prior to installation, install mounting plate into the electrical junction box with mounting screws. Drive screws completely to the end of the junction box.

2. Connect supply wires to wires on fixture with wire nuts. Connect white to white, black to black, and copper wire to copper wire as grounding connection.

3. Complete the installation by pushing the fixture springs towards the opening in the mounting plate installed on the junction box.

4. If you need different finish, you may snap in the trim ring of the color you want to the fixture.

Note: Choose 3000K (WW), 4000K (CW) or 5000K (DW) by manual dip switch on the back of disc light.