


CRAFTMADE™

MODEL# ZA6304PM-TB, ZA6304PM-TW


INSTALLATION INSTRUCTIONS

READ IMPORTANT SAFETY TIPS BEFORE PROCEEDING WITH INSTALLATION


SAFETY TIPS



Place wall switch in off position, if fixture has built-in switch or chain pull, switch or pull chain so fixture is off.




TURN OFF
POWER SOURCE




1

PROVIDED MOUNTING HARDWARE

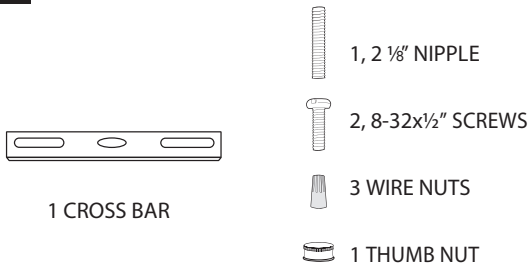


2

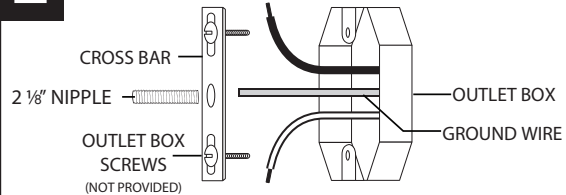


Attach cross bar to outlet box with provided 8-32x1/2" screws. Screw 2 1/8" nipple into crossbar.

3

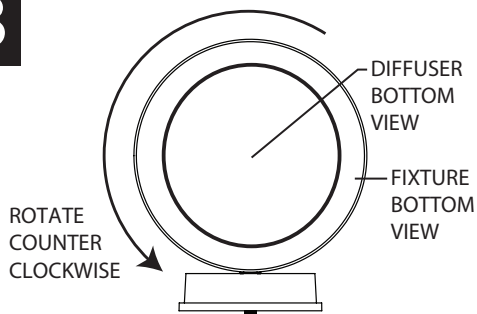


IF OPTIONAL DIFFUSER PROVIDED:
Remove diffuser from fixture. Grasp diffuser and rotate counter clockwise to unscrew.

4

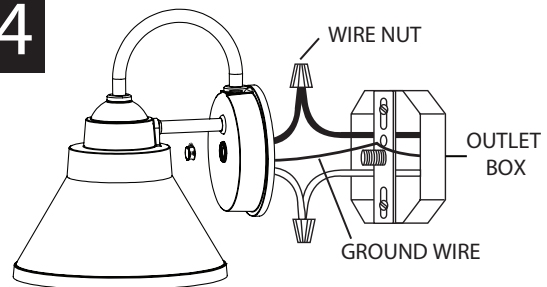


CONNECT THE WIRES. NOTE: Attach black fixture wire to black supply wire, white fixture wire to white supply wire. Do not mix up. Attach fixture ground wire to ground wire from outlet box. Use provided wire nuts.

5


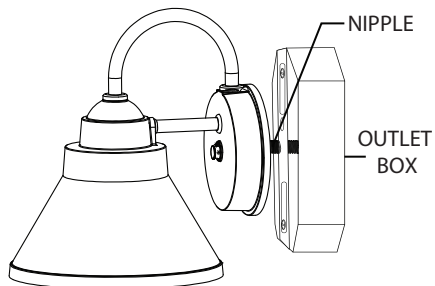


Position the fixture over the nipple and secure in place with thumb nut.

6

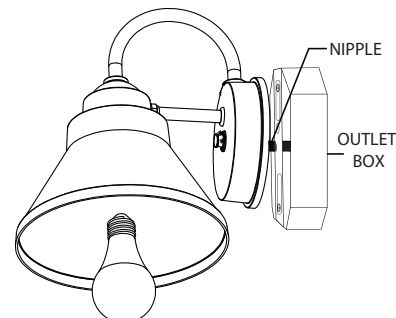

Screw light bulb into socket. Be sure to use bulb with wattage no greater than specified for fixture. Attach diffuser if provided.

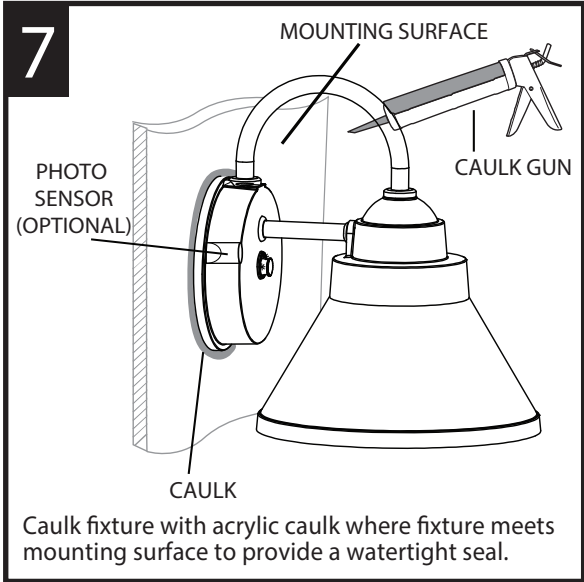

This fixture may also have an integral photo sensor or motion sensor. Photo sensor could possibly cycle on and off due to light reflected from nearby surfaces. If cycling occurs, remove photo sensor nut and install swivel hood base. The hood and base and adjustable hood can be rotated. Base can be cut along dotted line to reduce overall length. Check operation before cutting the base.



CLEAN ONLY WITH MILD SOAP AND WATER. AVOID SPRAYING WITH CLEANSERS, INSECTICIDES, AND PESTICIDES THAT ARE PETROLEUM BASED HYDROCARBON PRODUCTS. THESE WILL DEGRADE FIXTURE.

ICMZA6304PM