


CRAFTMADE™

READ THESE INSTRUCTIONS AND
SAVE THEM FOR FUTURE USE

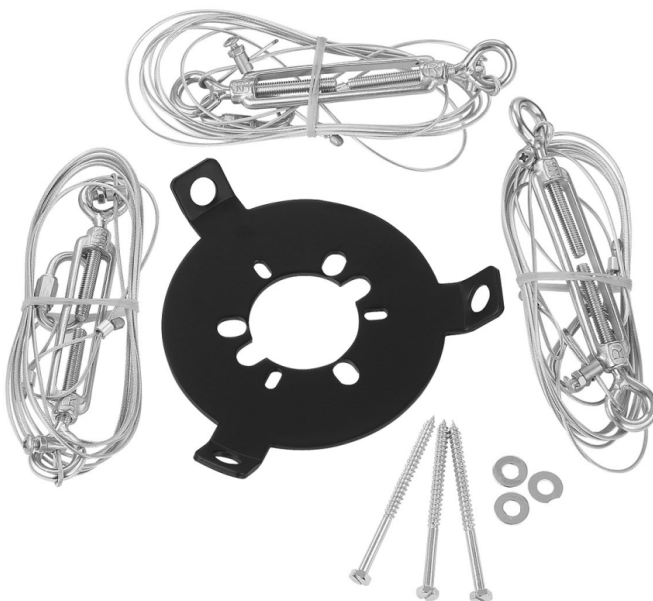

Guide wire system

Installation Guide

For Models:
GWS

Table of Contents:

Safety Tips. pg. 2

Parts Inventory. pg. 2

Installation Preparation. pg. 3

Guide wire system assembly. pgs. 3 - 4

Warranty. pg. 5

Parts Replacement. pg. 5

SAFETY TIPS.

WARNING: To reduce the risk of electrical shock, turn off the electricity to the fan at the main fuse box or circuit panel before you begin installation.

1. **READ ALL INSTRUCTIONS AND SAFETY INFORMATION CAREFULLY BEFORE INSTALLING THE ACCESSORY AND SAVE THESE INSTRUCTIONS. BE SURE TO HAVE AVAILABLE ALL SAFETY INSTRUCTIONS FOR THE FAN YOU HAVE INSTALLED.**

CAUTION: To avoid personal injury, the use of gloves may be necessary while handling parts with sharp edges.

2. Make sure all electrical connections comply with Local Codes or Ordinances, the National Electrical Code, and ANSI/NFPA 70-1999. If you are unfamiliar with electrical wiring or if the house/building wires are different colors than those referred to in the instructions, please use a qualified electrician.
3. The outlet box and ceiling support joist used must be securely mounted, and capable of supporting at least 35 pounds (15.9 kilograms). The outlet box must be supported directly by the building structure.

WARNING: To reduce the risk of fire, electrical shock, or personal injury, mount to an outlet box marked "Acceptable for Fan Support of 15.9 kg (35 lb) or less," and use the mounting screws provided with the outlet box as well as the two bolt screws and washers included with the fan. Most outlet boxes commonly used for the support of lighting fixtures are not acceptable for fan support and will need to be replaced. Consult a qualified electrician if in doubt.

4. After installation is complete, check that all connections are absolutely secure.

WARNING: To reduce the risk of serious bodily injury, DO NOT use power tools to assemble any part of the the guide wire system (or your fan, including the blades).

WARNING: To reduce the risk of personal injury, use **only** parts provided with this guide wire system. **The use of parts OTHER than those provided with this canopy locking system will void the warranty.**




WARNING: Guide wires should **NOT** be over tightened. Over tightening could cause the hanging ball to lift out of the hanging bracket. If necessary, use in conjunction with Canopy Locking System (CLS).

Distributed by: Craftmade, 3901 South 20th Avenue, DFW Airport, TX, 75261; 1-800-486-4892

NOTE: The important safety precautions and instructions appearing in the manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense and caution are necessary

1. Parts Inventory.

- a. guide wire. 3 pieces
- b. guide wire anchor. 1 piece
- c. hardware pack

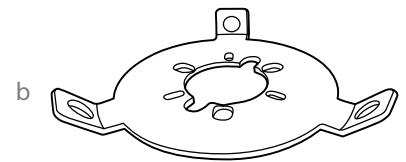

! IMPORTANT REMINDER: You must use the parts provided with this accessory for proper installation and safety. **!**

2. Installation Preparation.

Installation requires these tools:

Phillips screwdriver, flat-head screwdriver, adjustable pliers or wrench, stepladder.

Turn off circuit breakers to current fixture from breaker panel and be sure operating light switch is turned to the OFF position.


WARNING: Failure to disconnect power supply prior to installation may result in serious injury.

Remove existing fan from outlet box (refer to fan installation manual if necessary).

WARNING: Be sure the existing outlet box is securely attached to the building structure and can support the full weight of the fan. Ensure outlet box is clearly marked "Suitable for Fan Support of 15.9 kg (35lb) or less" and use mounting screws provided with the outlet box as well as the two bolt screws and all washers included with the accessory. If not, it must be replaced with an approved outlet box. Failure to do so can result in serious injury.

WARNING: If outlet box is not supported by a wood ceiling joist, **YOU MUST MAKE SURE** outlet box is able to support the weight of the fan.

CAUTION: Be sure outlet box is grounded properly and that a ground wire (**GREEN** or bare) is present.



3. Guide Wire System Assembly.

To install on a fan in a covered patio, remove 6 screws and washers from yoke plate at top of motor housing and set aside. Align holes in guide wire anchor with holes in yoke plate and re-insert screws that were previously removed. Tighten all screws securely. [Refer to **diagram 1**.]

Align openings on bottom of yoke cover with anchor holes on guide wire anchor.

Hang fan according to your fan instruction guide.

["Guide Wire System Assembly" continued on next page.]

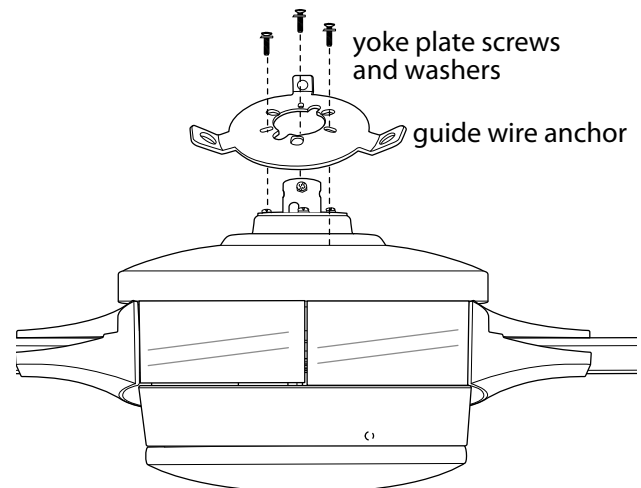


diagram 1

3. Guide Wire System Assembly. (cont.)

Secure clip on one guide wire to one opening of guide wire anchor. Repeat for remaining guide wires.

Find a secure attachment point (wood ceiling joist highly recommended) and secure guide wire. It will be necessary to use a heavy duty wood screw, and washer (*included in hardware pack*) with the guide wire loop. If necessary, adjust screws on the cable turnbuckles outward to allow maximum tension adjustment. The loop at the end of the guide wire should just fit over the threads on the wood screw. Adjust excess cable with brass collets with set screws. *Test guide wires by pulling on loose end of guide wire with pliers. If the guide wire slips, the loop must be adjusted smaller.* After installation is complete and guide wires are tightened, trim excess wire. [Refer to **diagram 2**.]

WARNING: Do NOT overtighten guide wire; leaving it taut may cause it to snap.

WARNING: Guide wires should **NOT** be over tightened. Over tightening could cause the hanging ball to lift out of the hanging bracket. If necessary, use in conjunction with Canopy Locking System (CLS).

WARNING: Guide wires **MUST** be used if installing fan in a covered patio.

NOTE: The important safety precautions and instructions appearing in the manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense and caution are necessary factors in the installation of this system.

Refer to your fan instruction guide for any additional installation instructions that may be necessary for your fan.

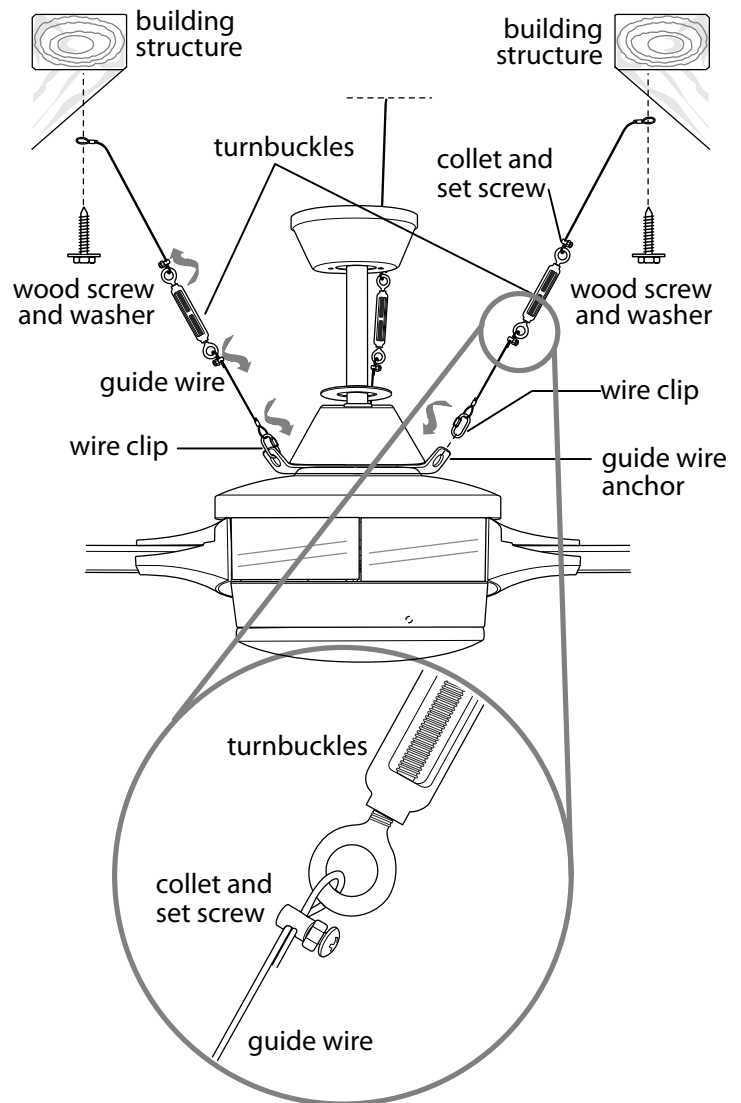


diagram 2

Warranty.

CRAFTMADE™ One-Year Limited Warranty:

CRAFTMADE warrants this accessory to the original household purchaser for indoor/outdoor use under the following provisions:

1-YEAR WARRANTY: CRAFTMADE will replace or repair any accessory which has faulty performance due to a defect in material or workmanship. Contact Craftmade Customer Service at **1-800-486-4892** to arrange for return of accessory for repair. Return accessory, shipping prepaid, to Craftmade. We will repair the accessory or ship you a replacement, and we will pay the return shipping cost.

The purchaser shall be responsible for all costs incurred in the removal, reinstallation and shipping of the product for repairs.

This warranty does not apply when damage from mechanical, physical, electrical or water abuse results in causing the malfunction. Deterioration of finishes or other parts due to time or exposure to salt air is specifically exempted under this warranty.

Neither Craftmade nor the manufacturer will assume any liability resulting from improper installation or use of this product. In no case shall the company be liable for any consequential damages for breach of this, or any other warranty expressed or implied whatsoever. This limitation as to consequential damages shall not apply in states where prohibited

Parts Replacement.

For parts and information, please refer to "Parts Inventory" on page 2.

Craftmade Customer Support:

1-800-486-4892

www.craftmade.com

CRAFTMADE™