


LED Lighted Mirror # MIR2413M-W3C

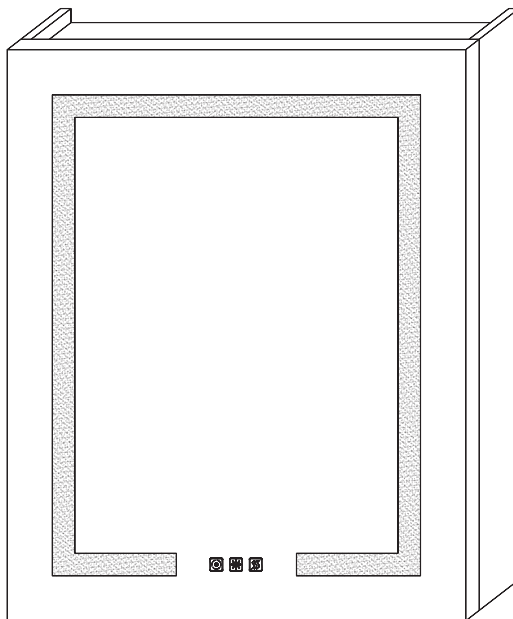


IMPORTANT SAFETY INSTRUCTIONS

- Attention to installer, must test the light fixture before installation.
- When using an electrical fixture, basic precautions should always be followed, including the following:
- Read all instructions before using (this fixture).
- ⚠ **DANGER** - To reduce the risk of electric shock: Always unplug this fixture from the electrical outlet before cleaning or servicing.
- ⚠ **WARNING** - To reduce the risk of burns, fire, electric shock, or injury to persons:
 - Unplug from outlet before putting on or taking off parts.
 - Close supervision is necessary when this fixture is used by, or near children, invalids, or disabled persons.
 - Use this fixture only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer.
 - Never operate this fixture if it has a damaged cord or plug, if it is not working properly, if it has been dropped or damaged, or dropped into water. Return the fixture to a service center for examination and repair.
- Keep the cord away from heated surfaces.
- Never operate the fixture with the air openings blocked. Keep the air openings free of lint, hair, and the like.
- Never drop or insert any object into any opening.
- Do not operate where aerosol (spray) products are being used or where oxygen is being administered.
- To disconnect, turn all controls to the off position, then remove plug from outlet.
- ⚠ **WARNING:** Risk of Injury - Keep children away from this fixture.
- ⚠ **WARNING:** Risk of Electric Shock - Connect this fixture to a properly grounded outlet only. See Grounding Instructions.
- **GROUNDING INSTRUCTIONS:**
 - For a permanently connected fixture: This fixture must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the product.
 - For a grounded, cord-connected product rated max 15 amperes and intended for use on a nominal 120-volt supply circuit :
 - This fixture is for use on a nominal 120-volt circuit and has a grounding plug. Make sure that the product is connected to an outlet having the same configuration as the plug. No adapter should be used with this product.
- For loading always put heavier items at the bottom and not near the top in order to help prevent the possibility of the fixture tipping over.
- ⚠ **WARNING:** Risk of Injury to Persons - do not use this fixture to support video equipment such as televisions or computer monitors.
- Mount fixtures at the correct height.
- This fixture is suitable for installation in a damp, indoor location only.
- This fixture is to be mounted to a metal electrical junction box (outlet box) directly supported by the building structure.
- Save this instructions for future reference.
- Estimated Assembly Time: 20 minutes
- Tools Required For Assembly (not included): Flathead screwdriver, Phillips screwdriver, Pliers, Electrical tape and Wire cutters.
- Helpful Tools (not included): Wire strippers, Ladder, Level.

CRAFTMADE™

Model Specification (type 1)

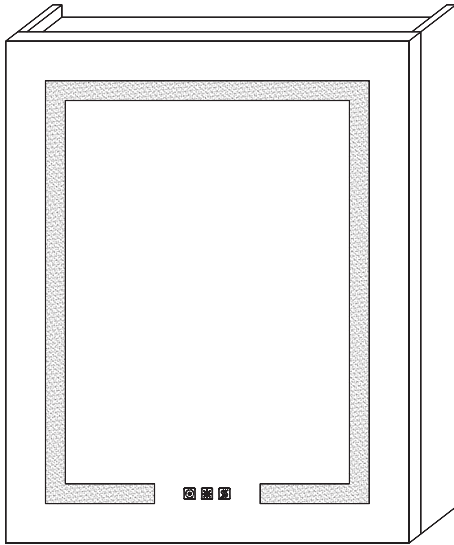


- Aluminum Frame
- Integrated LED
- Double Side Mirror
- Adjustable Shelves
- Quiet Hinge
- Recessed or surface mounting
- Color Temperature:3000-5000K
- Dimming
- Anti Fog
- GFCI
- **Light-Sensitive Night Light**

No.	Dimension	Color	Door Type	Remark
1	20"×26"	Silver / Matte Black	Single door Left or Right	Type1
2	20"×26"	Silver / Matte Black	Single door Left or Right	Type2
3	20"×30"	Silver / Matte Black	Single door Left or Right	
4	20"×32"	Silver / Matte Black	Single door Left or Right	
5	20"×36"	Silver / Matte Black	Single door Left or Right	
6	24"×30"	Silver / Matte Black	Single door Left or Right	
7	24"×32"	Silver / Matte Black	Single door Left or Right	
8	24"×36"	Silver / Matte Black	Single door Left or Right	
9	28"×30"	Silver / Matte Black	Double Door	
10	30"×26"	Silver / Matte Black	Double Door	
11	30"×30"	Silver / Matte Black	Double Door	
12	30"×32"	Silver / Matte Black	Double Door	

CRAFTMADE™

Model Specification (type 1)

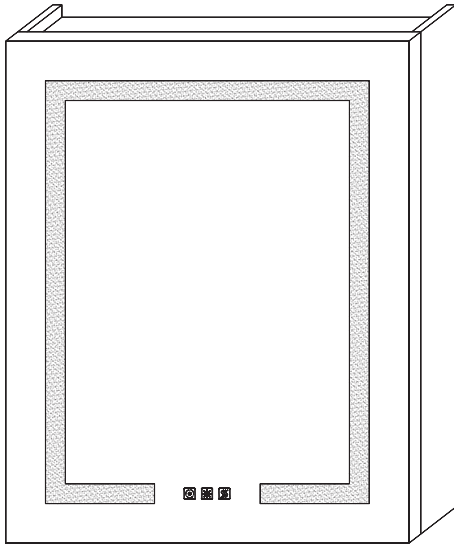

- Aluminum Frame
- Integrated LED
- Double Side Mirror
- Adjustable Shelves
- Quiet Hinge
- Recessed or surface mounting
- Color Temperature:3000-5000K
- Dimming
- Anti Fog
- GFCI
- **Light-Sensitive Night Light**

No.	Dimension	Color	Door Type	Remark
13	30"×36"	Silver / Matte Black	Double Door	
14	32"×30"	Silver / Matte Black	Double Door	
15	36"×30"	Silver / Matte Black	Double Door	
16	36"×32"	Silver / Matte Black	Double Door	
17	36"×36"	Silver / Matte Black	Double Door	
18	40"×30"	Silver / Matte Black	Double Door	
19	40"×32"	Silver / Matte Black	Double Door	
20	44"×30"	Silver / Matte Black	Double Door	
21	44"×32"	Silver / Matte Black	Double Door	
22	48"×30"	Silver / Matte Black	Triple Door	
23	48"×32"	Silver / Matte Black	Triple Door	
24	48"×36"	Silver / Matte Black	Triple Door	
25	60"×32"	Silver / Matte Black	Triple Door	

CRAFTMADE™



For easy and safe installation, please refer to the following:

Read all instructions thoroughly before installing the enclosed product. Read and take note of all **Safety Precautions**, care and maintenance information.

PLEASE KEEP THIS INSTRUCTION MANUAL FOR FUTURE REFERENCE DURING PRODUCT OPERATION AND MAINTENANCE.

CRAFTMADE™



WARNING AND SAFETY INSTRUCTIONS

Before installing your LED Medicine Cabinet, please make sure that you carefully read through this instruction sheet, refer back to them during installation to ensure your product is fitted safely and correctly. Keep the instructions for future use.

WARNING Risk of Fire and Electric Shock

- All fittings must be installed in accordance with current IEE wiring regulations. If in doubt, please consult a qualified electrician.
- Turn breaker off the electrical supply at the main circuit board before installation and maintenance.
- Suitable for indoor use only. This product should be positioned well away from curtains and fabrics. Never cover the mirror.
- Regularly check any parts for damage, if any part is damaged the product should not be used.

INSTALLATION SAFETY

- Inspect the product immediately upon receipt for any possible damage during transportation or missing parts. Handle the product with care and protect against knocks to all sides and edges of the glass.
- Ensure there are no hidden pipes or cables in the wall before drilling and sawing.
- Wear suitable safety glasses when drilling. Take care if drilling on tiled surfaces in case the drill slips.

CAUTION


The light source of this product is non-changeable light diodes (LED). **Do not disassemble the product**, as the light diodes can cause damage to the eyes.

NOTE: The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture. Do not install this fixture in hazardous locations.


CRAFTMADE™

PARTS SUPPLIED


Z- Mounting Bar
×1




Z-Supporting Hook
×2




Anchors A
×1




Shelves Support
×4~8




Wire Cap
×3




Side Panel
×2

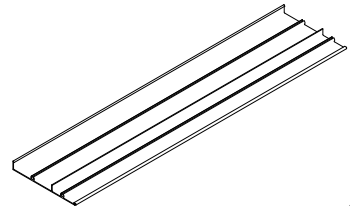

Side Panel Covers
×4




Side Panel Cover Screws
×10




Anchors B
×5~10



Anchor Screws
×5~10



Shelves
×2~6



Hinge Covers
×2~8




CRAFTMADE™

TOOLS REQUIRED


Drill




Pencil



Level



Tape



Gloves




Safety Glasses




**Phillip
Screw Driver**



**Drill Bit
8mm(5/16")**



Hammer



CRAFTMADE™

Installation Instruction




The medicine cabinet supports two installation methods:
1.Surface Installation and **2.Embedded Installation**.

Please choose the installation way that best suits you.


CRAFTMADE™

Before installing the medicine cabinet, please remove the cabinet doors first. This will make the installation easier, more convenient and safer.

1. First, disconnect the cords from the cabinet .

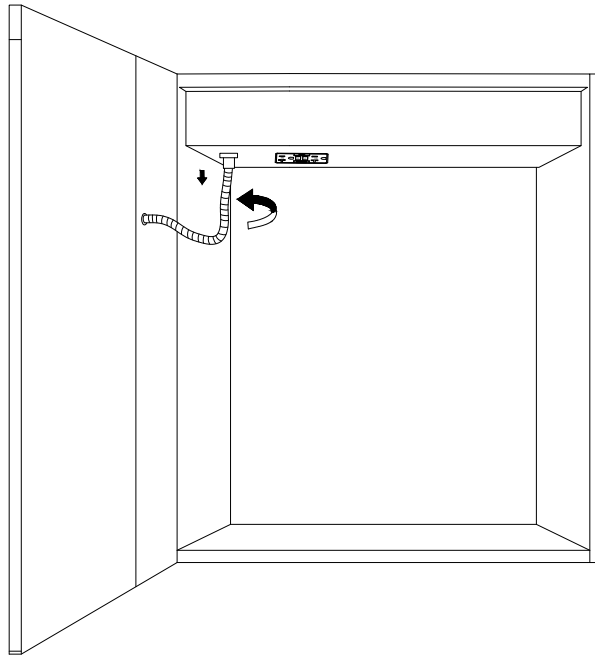


2. Then, press the end of the hinges and detach the cabinet door.

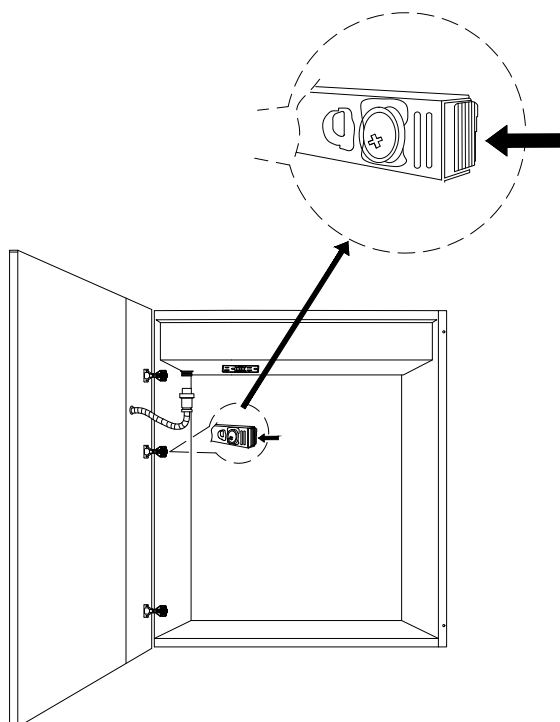

CRAFTMADE™


Surface Installation Instruction

Verify minimum clearances

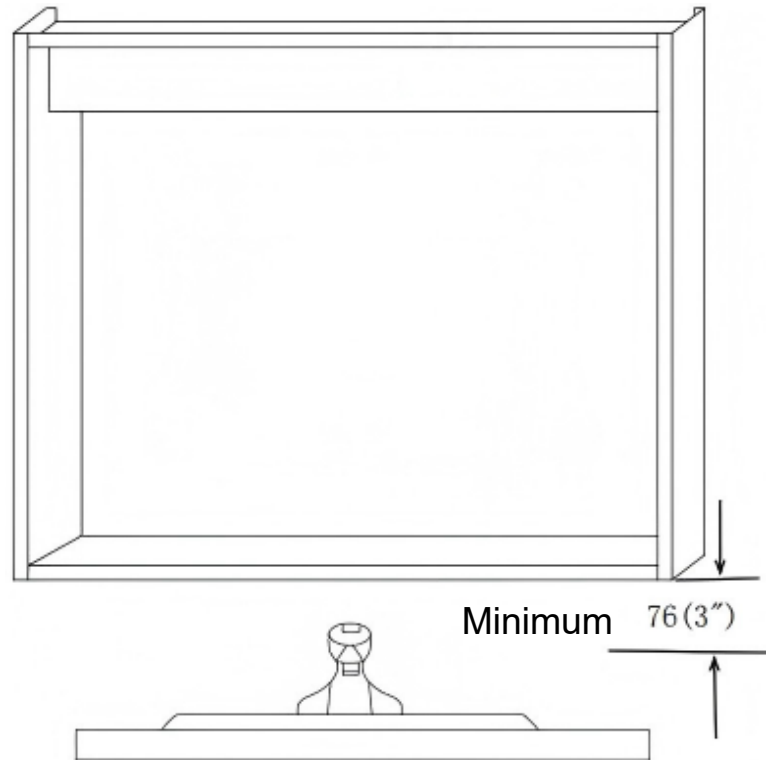

STEP 1

H is the total height of the medicine cabinet, and W is the total width of the medicine cabinet

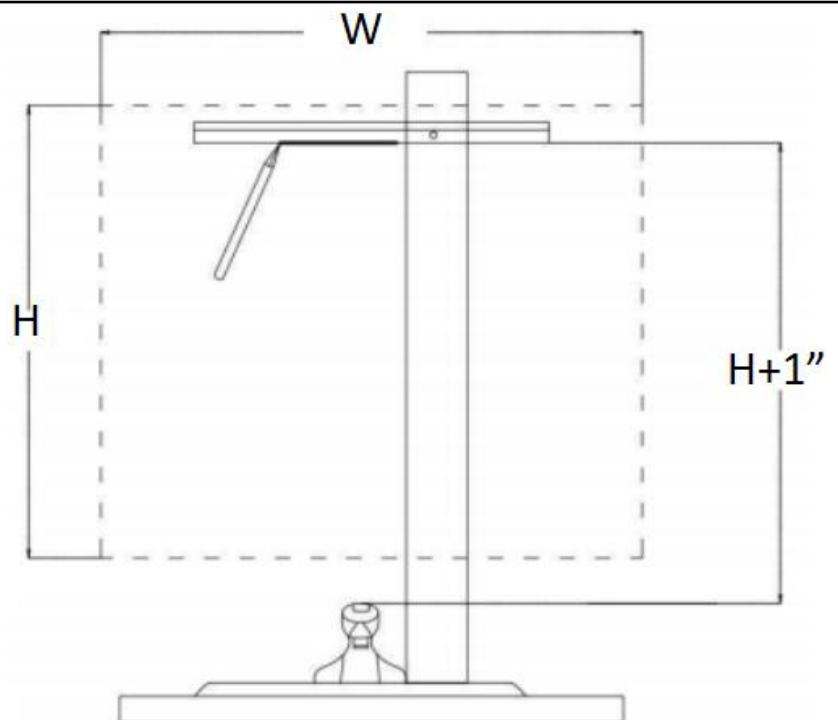


STEP 2

CRAFTMADE™


Surface Installation Instruction

- A) Mark holes locations on the wall. All markings must be properly leveled.
B) Drill holes and insert anchor where needed.

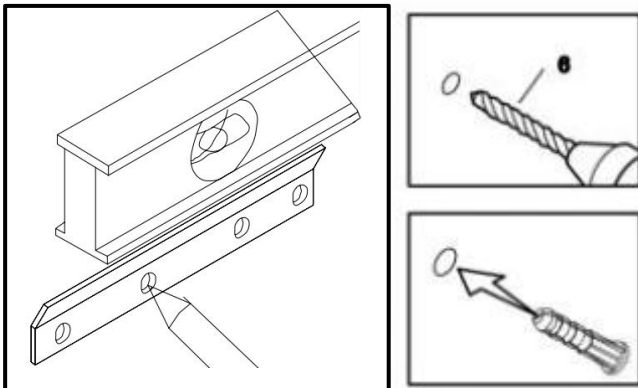


STEP 3

Secure the bar with Flat head screws provided.

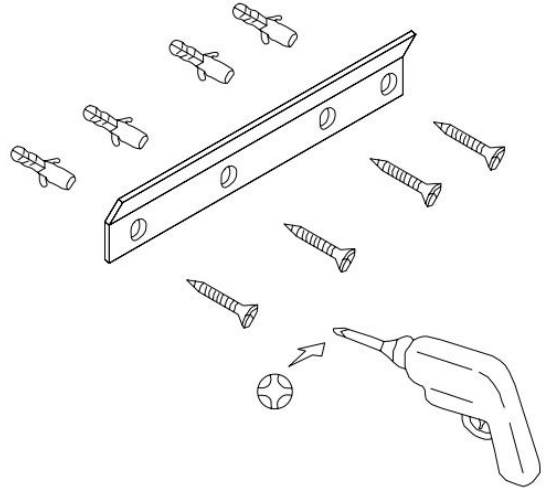


STEP 4

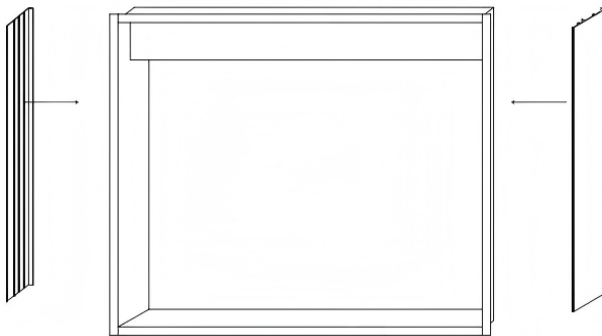

STEP 5

The side panels and cabinets are individually packaged , you need follow the STEP 5 to STEP 6 to install the side panels for surface mounting, for embedded installation no need to install the side boards.

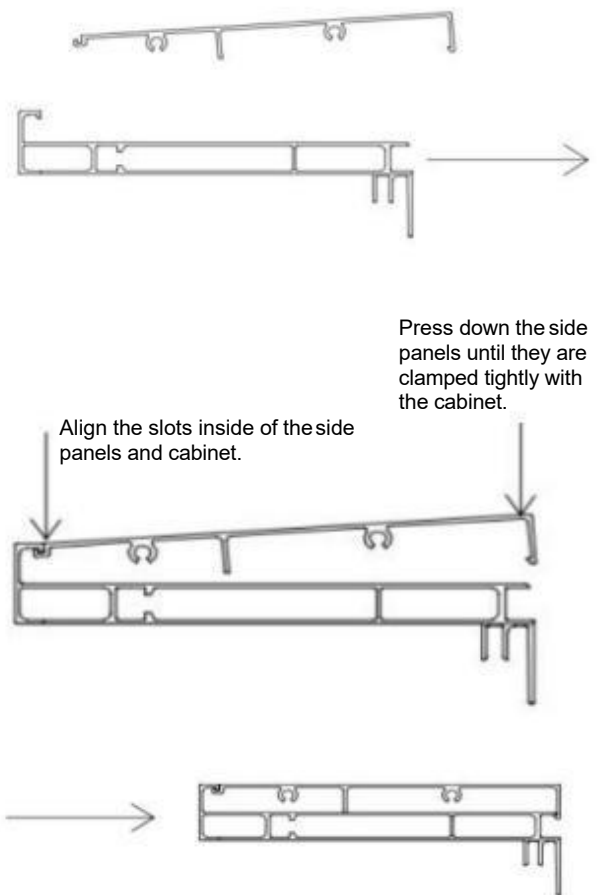


Press down the side panels until they are clamped tightly with the cabinet.

Align the slots inside of the side panels and cabinet.

STEP 6


CRAFTMADE™

Surface Installation Instruction

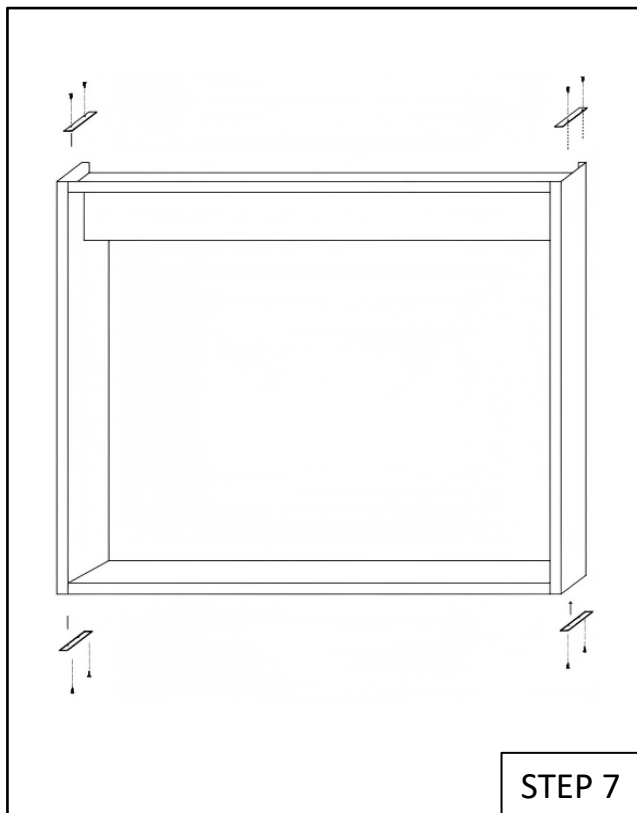


Connect the wires


BLACK WIRE --- POWER SUPPLY L (LINE)
 WHITE WIRE --- POWER SUPPLY N (NEUTRAL)
 GREEN WIRE --- POWER SUPPLY G (GROUND)

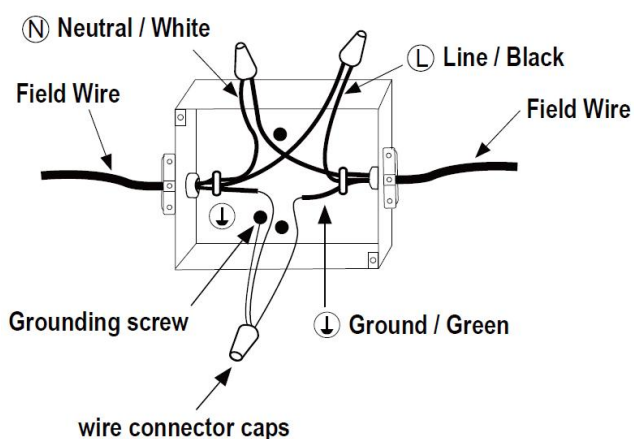

Lift the cabinet and slide it down over the mounting bar.
 Make sure the hooks engage the bar.

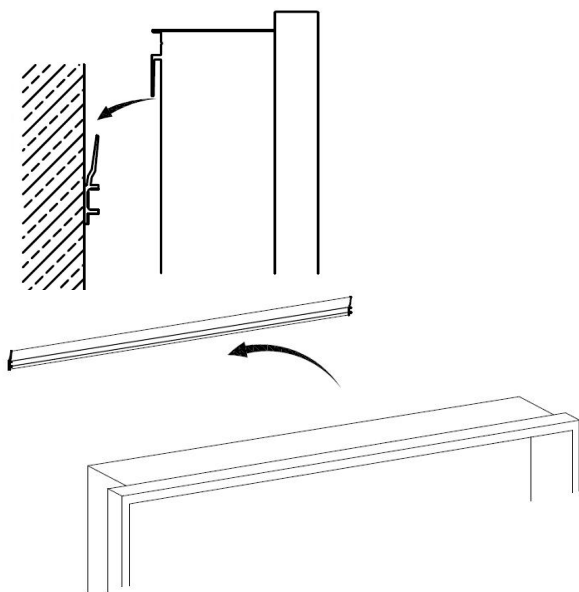

Place the support angle on the bottom of the cabinet and mark hole location on the wall. Drill hole and insert anchor where needed. Fix the support angle by screw. Always look for wood studs behind the drywall for stronger installation.

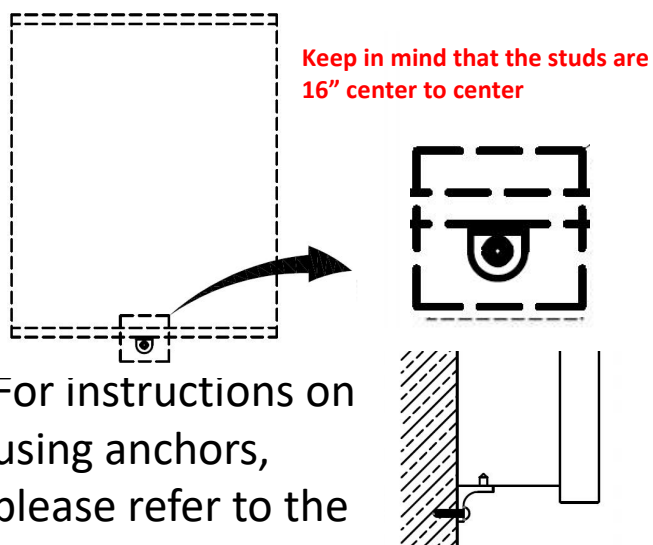

CRAFTMADE™


Surface Installation Instruction

Rules for Selecting Anchors

Installing on Drywall:

- Use Anchors A to ensure a secure installation on drywall.
- Anchors A are designed to provide adequate support on drywall.

Anchors A



Installing on concrete wall:


- Use Anchors B for a stronger installation.
- Anchors B are specifically designed for concrete wall, offering higher fastening strength.

Anchors B



STEP 10

Install the glass shelves by mounting them over the shelves supports.

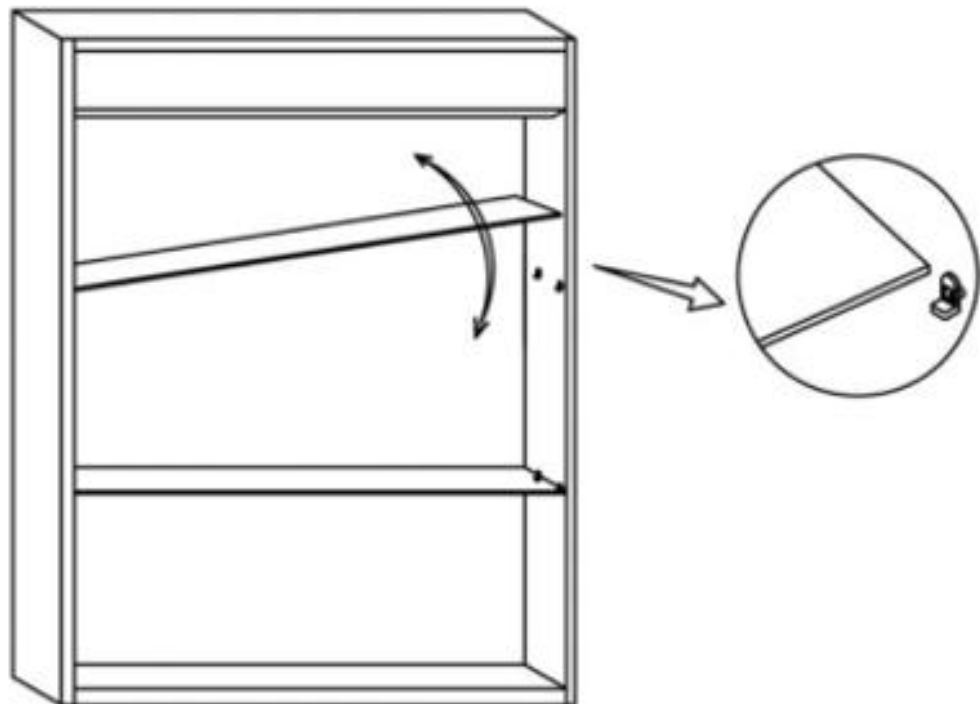


STEP 11


CRAFTMADE™

Step12: Cabinet Door Installation

1. Please ensure that the latch on the hinge is fully extended. This can be achieved by rotating the adjusting screw clockwise near the latch, which will make it easier to install the cabinet door.

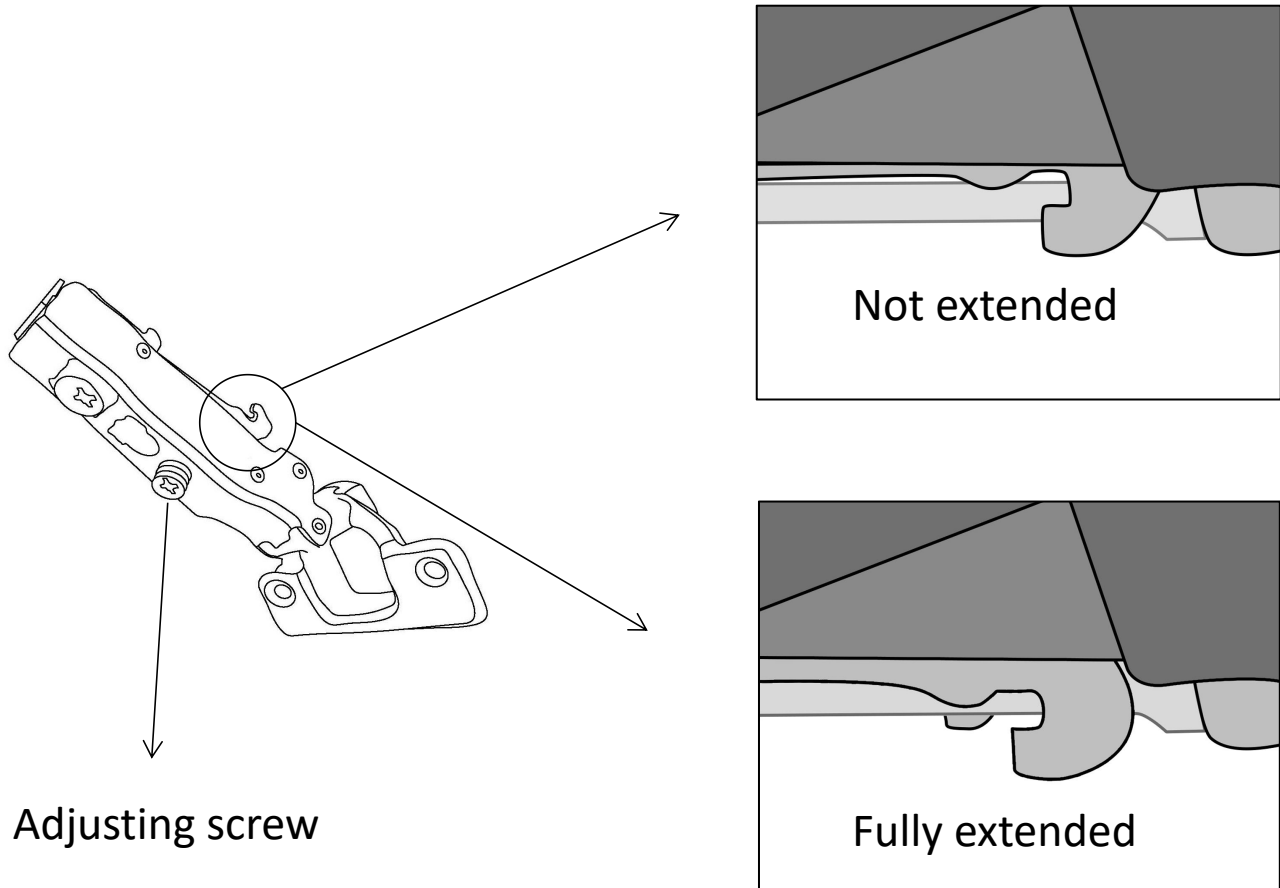



2. Insert the hinges to the base ,then connect the doors with the cabinet.

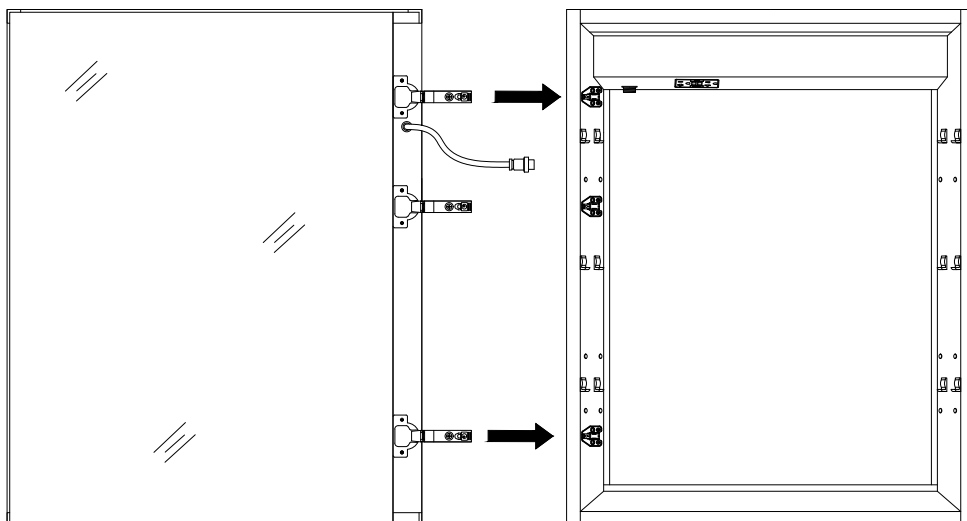


CRAFTMADE™

Step12: Cabinet Door Installation

3.If necessary , adjust corresponding screws on the hinge to align the doors, ensure that gaps are even and the doors open and close smoothly.

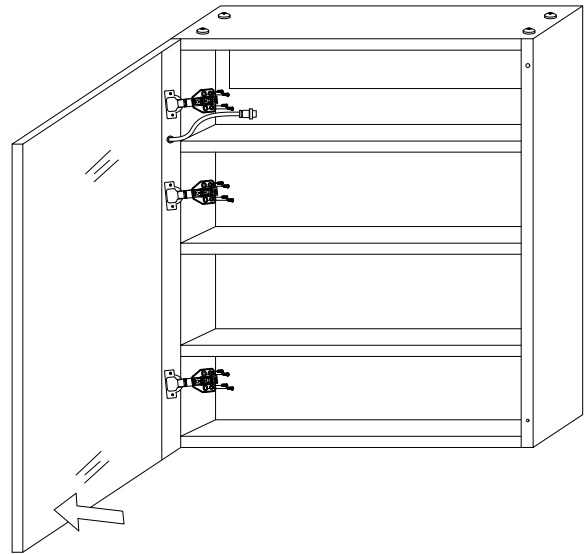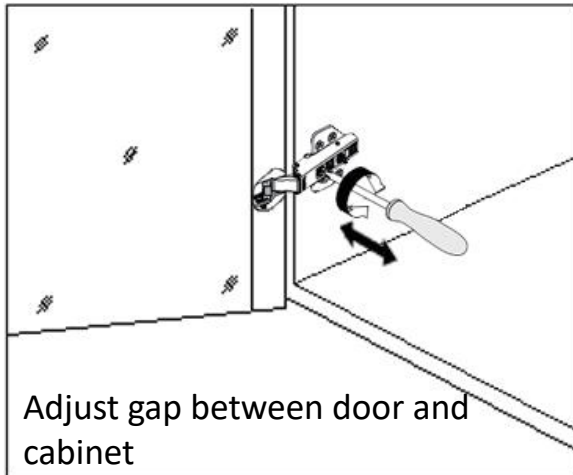


4. Connect the electrical cord on the door to the cabinet and tighten it properly.

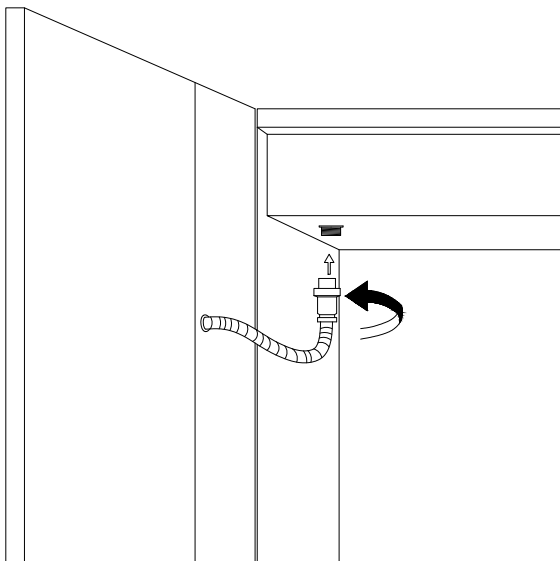

CRAFTMADE™

Embedded Installation Instruction

Before installing, it is necessary to determine the opening size, which can be referred to in the table below.

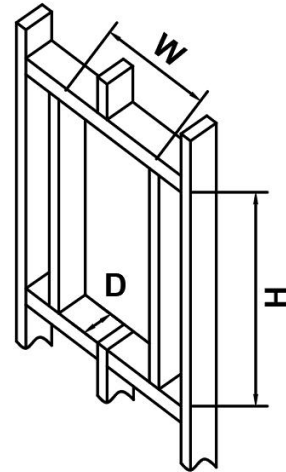


Actual cabinet		Wall opening dimensions for embedded installation all in Inches.		
No.	Dimensions	W (Width)	H (Height)	D (Depth)
1	20"×26"	19-1/4	25-1/4	4-3/8
2	20"×30"	19-1/4	29-1/4	4-3/8
3	20"×32"	19-1/4	31-1/4	4-3/8
4	20"×36"	19-1/4	35-1/4	4-3/8
5	24"×30"	23-1/4	29-1/4	4-3/8
6	24"×32"	23-1/4	31-1/4	4-3/8
7	24"×36"	23-1/4	35-1/4	4-3/8
8	28"×30"	27-1/4	29-1/4	4-3/8
9	28"×32"	27-1/4	31-1/4	4-3/8
10	30"×26"	29-1/4	25-1/4	4-3/8
11	30"×30"	29-1/4	29-1/4	4-3/8
12	30"×32"	29-1/4	31-1/4	4-3/8
13	30"×36"	29-1/4	35-1/4	4-3/8

Note: Some dimension information is on the next page.

CRAFTMADE™

Embedded Installation Instruction

Before installing, it is necessary to determine the opening size, which can be referred to in the table below.

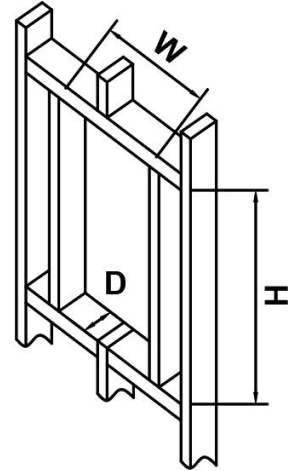


Actual cabinet		Wall opening dimensions for embedded installation all in Inches.		
No.	Dimensions	W (Width)	H (Height)	D (Depth)
14	32"×30"	31-1/4	29-1/4	4-3/8
15	36"×30"	35-1/4	29-1/4	4-3/8
16	36"×32"	35-1/4	31-1/4	4-3/8
17	36"×36"	35-1/4	35-1/4	4-3/8
18	40"×30"	39-1/4	29-1/4	4-3/8
19	40"×32"	39-1/4	31-1/4	4-3/8
20	44"×30"	43-1/4	29-1/4	4-3/8
21	44"×32"	43-1/4	31-1/4	4-3/8
22	48"×30"	47-1/4	29-1/4	4-3/8
23	48"×32"	47-1/4	31-1/4	4-3/8
24	48"×36"	47-1/4	35-1/4	4-3/8
25	60"×32"	59-1/4	31-1/4	4-3/8

CRAFTMADE™

Embedded Installation Instruction


Determine the size of the opening

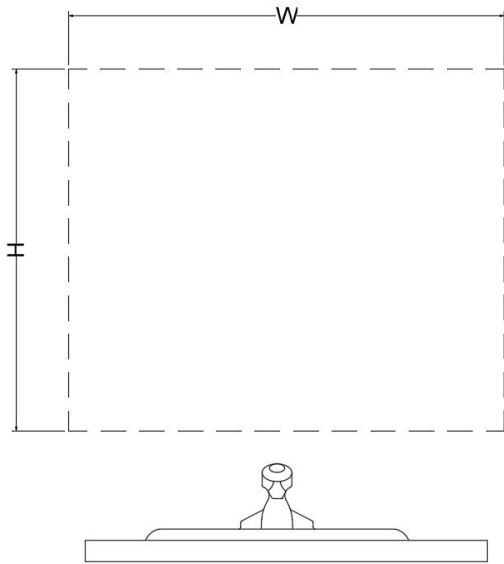


STEP 1

Connect the wires

BLACK WIRE --- POWER SUPPLY L (LINE)
WHITE WIRE --- POWER SUPPLY N (NEUTRAL)
GREEN WIRE --- POWER SUPPLY G (GROUND)

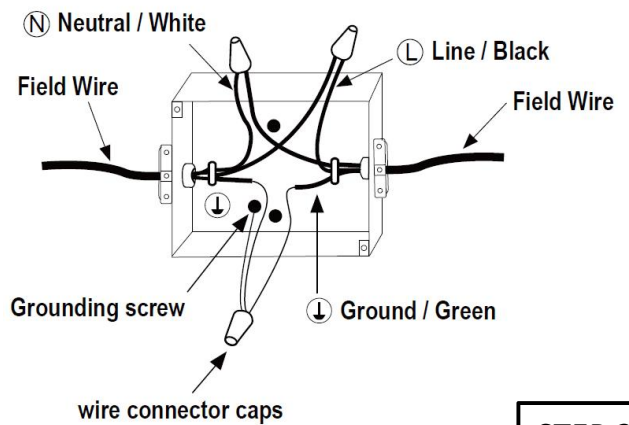


STEP 2

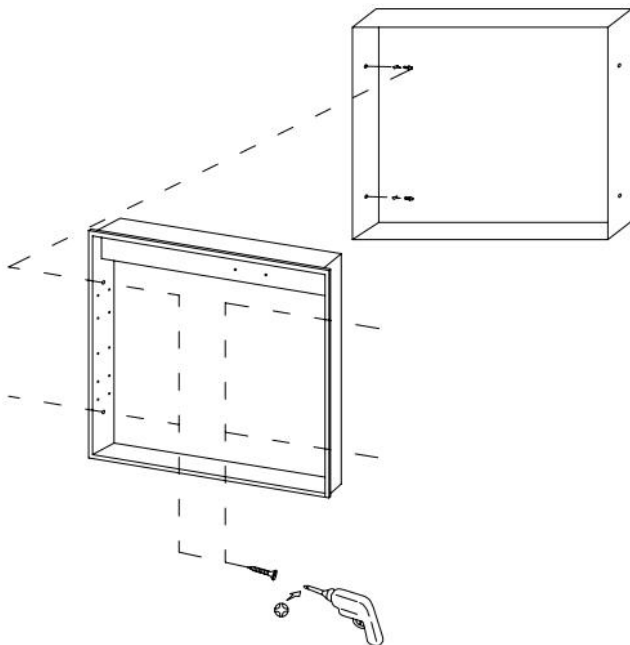

STEP 3

Install the glass shelves by mounting them over the shelves supports.

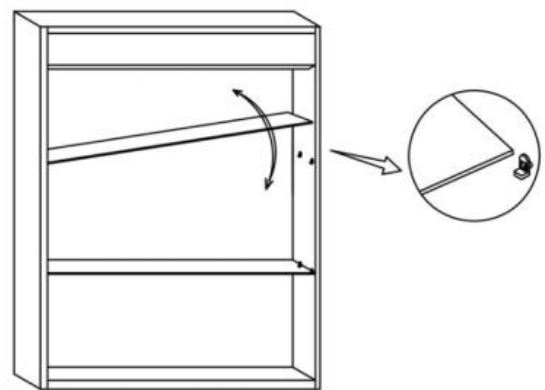


STEP 4

*All diagrams are for reference only. All model dimensions and proportion position will vary.


CRAFTMADE™

Step5: Cabinet Door Installation

1. Please ensure that the latch on the hinge is fully extended. This can be achieved by rotating the adjusting screw clockwise near the latch, which will make it easier to install the cabinet door.

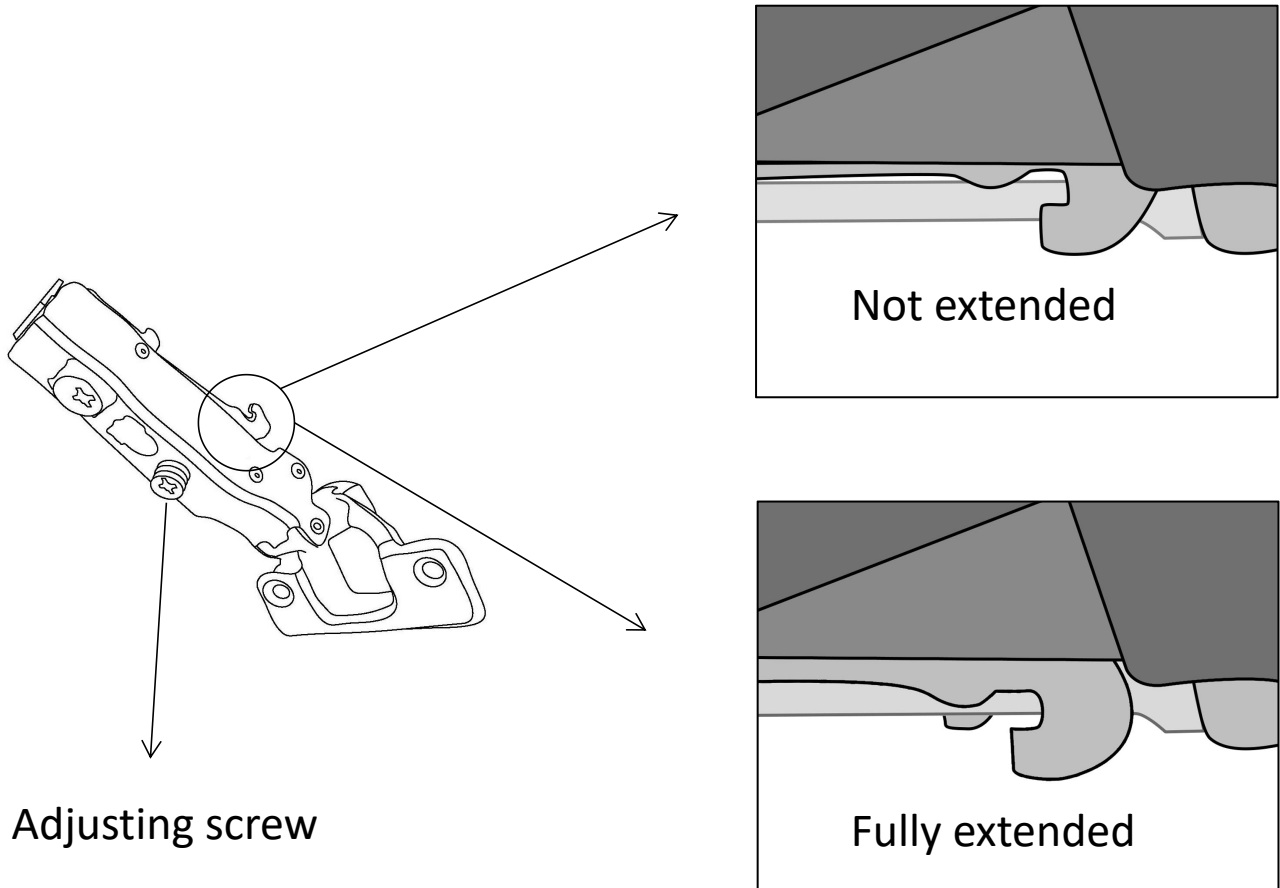



2. Insert the hinges to the base ,then connect the doors with the cabinet.

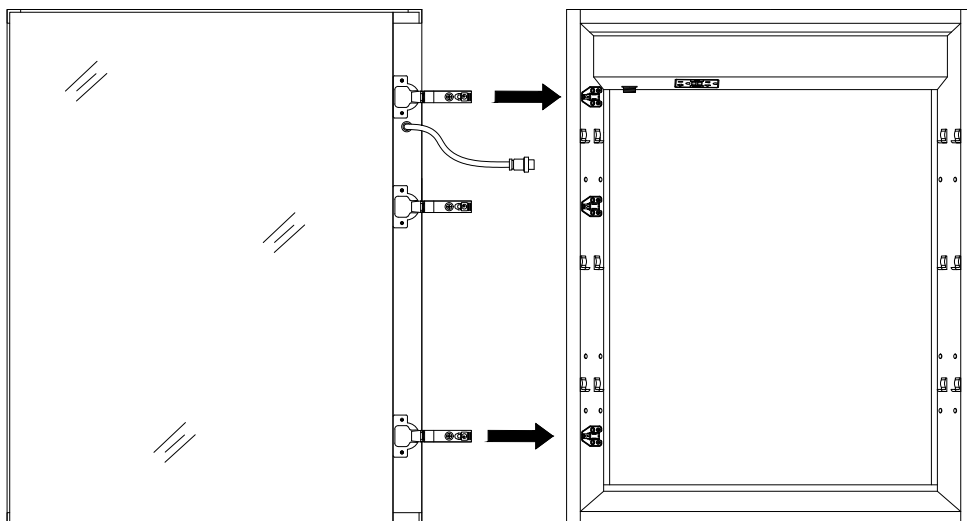


CRAFTMADE™

Step5: Cabinet Door Installation

3.If necessary , adjust corresponding screws on the hinge to align the doors, ensure that gaps are even and the doors open and close smoothly.

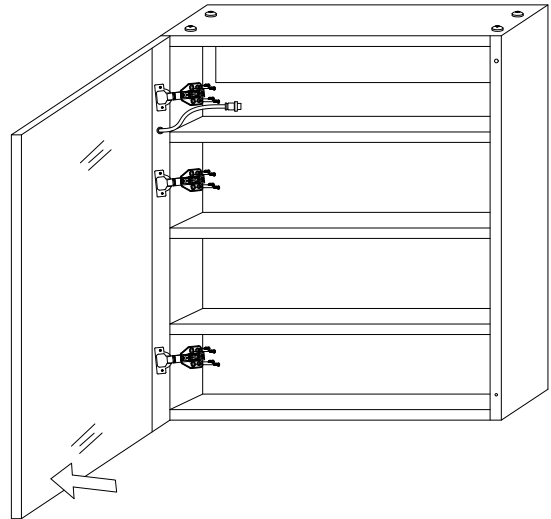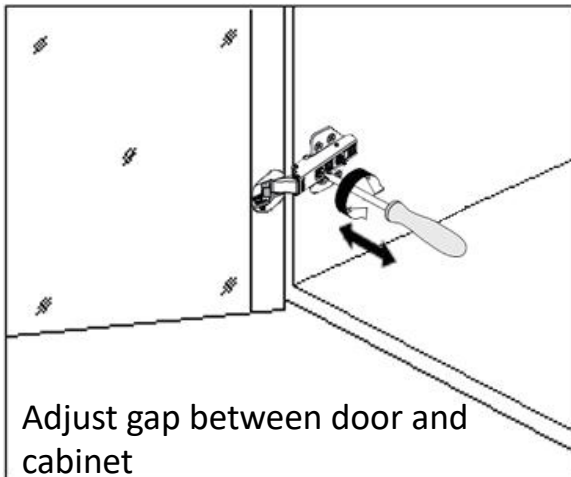

4. Connect the electrical cord on the door to the cabinet and tighten it properly.

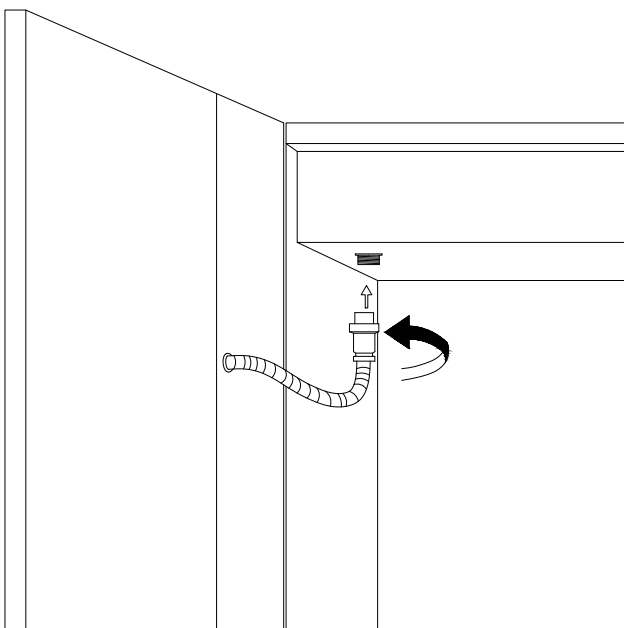


CRAFTMADE™

Operating Manual


The buttons turn blue when connected to the main power supply and turn white after a brief touch.



- Briefly touch the button to turn the mirror on or off.
- Press and hold the button to change the color temperature when the mirror is on.
- Optional to be wired to wall switch by ON/OFF memory function.




- Briefly touch the button to turn the mirror on or off.
- Press and hold the button to adjust the brightness.
- Release the button when the brightness reaches your desired level



- The mirror begins to warm up and defog after you press the defogger button.
- Press the button again to turn off the anti-fog function.
- **Press and hold the button to turn the blue backlight on or off.**
- Note: To prevent damage from prolonged high temperatures, the defogger will automatically stop after 60 minutes of continuous operation.

CRAFTMADE™

● Electrical components inside the cabinet

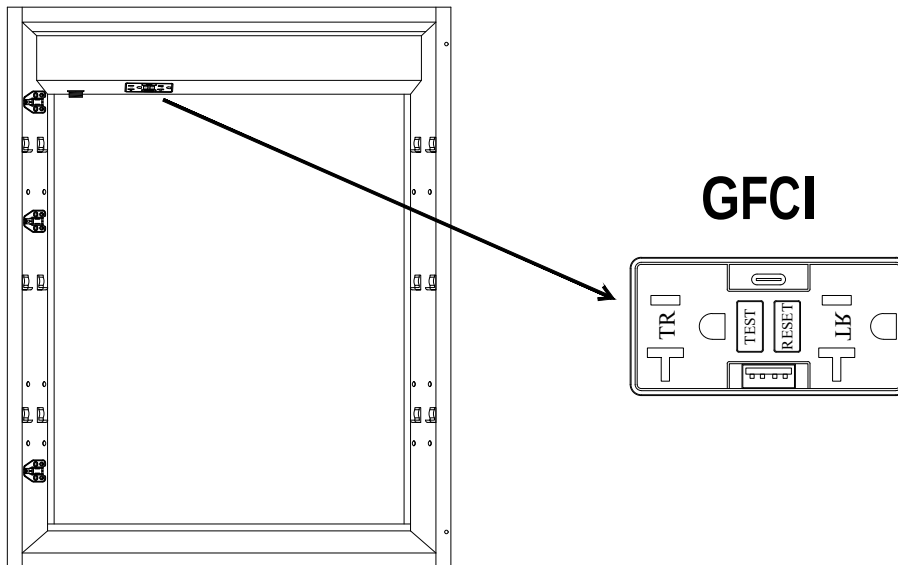


1. GFCI


The GFCI is separate from the circuitry night light which is installed in the door. So is the LED light inside the cabinet. For example, if the GFCI shuts off, and the door is opened, the light night and the LED light inside the cabinet shall still turn on.

2. Light Sensitive Night Light

The top view of cabinet door



The bottom-up view of cabinet door



Rocker Switch

LED

- When the ambient brightness decreases, the night light will turn on.
- The rocker switch allows you to toggle the night light function on or off.
- Don't cover the sensor.

CRAFTMADE™

Craftmade Lighting Limited Warranty for Mirrors

All products are designed to be sold in North America with 120 Volt / 60Hz electric grid.

Craftmade warrants all its Products to be free from defects in material and workmanship, subject to certain conditions and exclusions, for period of one year from the date the Product was shipped to the original end use purchaser. LED product is warranted for a period of 3 years from the date purchased or shipped to the original end use purchaser. Craftmade will warrant its product only if it is sold through an authorized Craftmade dealer.

Craftmade will, at its discretion, repair, replace or make appropriate adjustment where inspection discloses any defects occurring in normal usage within the applicable time period above, subject to the following conditions and exclusions.

The following costs, expenses and damages are not covered by the provisions of this limited warranty: (1.) labor costs including, but not limited to, costs associated with the removal and reinstallation of Product; (2.) shipping and freight expenses required to return Product to Craftmade.

All warranties only apply to the original end use purchaser and original installation of Products. **This warranty is not transferable.** The provisions of this warranty do not apply to products that are used in commercial applications; used for purposes for which they are not designed or intended; which have been subjected to alteration, accidental damage, abuse, misuse, negligence or accident; which have been improperly stored, installed, maintained or operated; which have been used in violation of written instructions provided by Craftmade; which have been subjected to improper temperature, humidity or other environmental conditions; or which, based on examination by Craftmade, do not disclose to the satisfaction of Craftmade non-conformance to the warranty. Additionally, this warranty **DOES NOT COVER** scratches, abrasions, or deterioration due to the use of paints, solvents, chemicals or abrasive cleaning techniques.

The above warranties also do not apply if:

The original bill of sale, delivery date, or product number cannot be verified.

The parts claimed to be defective are not returned for inspection if so requested by Craftmade.

The product is not in the possession of the original end use purchaser at the time warranty claim is made.

To obtain Warranty Service, please contact Craftmade through your Lighting Dealer, Lighting Contractor, or by writing Craftmade

Attn: Customer Service Department, 3901 S. 20th Avenue DFW Airport, TX 75261, or by calling 800.486.4892

Warranty Exclusions:

We use the best weather resistant finishes, nevertheless finishes for fixtures installed outdoors are subject to change due to prolonged exposure to sunlight, pollutants and other environmental conditions. Any claim for fading, discoloration or "patina" of a finish on an outdoor fixture is not applicable to the above warranty. See the "Finish Care & Cleaning" instructions below for proper care and maintenance of your fixture.

The environment within ten miles of a sea coast can be extremely corrosive. Even with the appropriate maintenance, products installed in this environment will typically deteriorate more than products installed in a less severe environment. Some corrosion and/or deterioration is considered "normal wear" in this environment. Any claim for finish failures or for corrosion of other components due to coastal environment conditions is not applicable to the above warranty.

We cannot warranty our Direct Burial Poles due to environmental issues such as moisture, soil acidity and other corrosive soil and air conditions.

At Craftmade we try our best to assure that glass and metal finishes shown in our catalogs match the actual product, but chemical finish variations and hand applied finishes can result in differences between the actual product and printed images. Craftmade does not authorize any person to create for it any obligation or liability in connection with its Products. The maximum liability is limited to the original purchase price of the product. No action arising out of any claimed breach of this warranty by Craftmade may be brought by the Original User more than one (1) year after the cause of action has arisen.

IMPLIED WARRANTIES INCLUDING THAT OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY LIMITED TO THE DURATION OF THIS WARRANTY. CRAFTMADE AND/OR SELLER DISCLAIMS ANY LIABILITY FOR SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. Some states do not allow limitations on incidental or consequential damages or how long an implied warranty lasts, so that the above limitations may not fully apply to you. Refer to your local laws for your specific rights under this warranty.

CARE & CLEANING:

- To avoid electrical hazards, unplug before cleaning.
- Clean only the glass and frame—do **NOT** touch electrical components.
- Ensure the mirror is completely dry before reconnecting power.
- Use a soft, dry, lint-free cloth for routine cleaning.
- If needed, lightly dampen the cloth with water or a mild glass cleaner.
- **NEVER** spray cleaner directly on the mirror— apply it to the cloth first.

AVOID:

- Harsh chemicals (such as ammonia, bleach, vinegar)
- Abrasive pads or rough cloths
- Excess moisture near the mirror edges (to prevent "black edge" damage).

CRAFTMADE™

Garantía Limitada de Craftmade para espejos

Todos los productos están diseñados para su venta en Norteamérica con una red eléctrica de 120 voltios / 60 Hz.

Craftmade garantiza todos sus Productos libres de defectos en materiales y fabricación, sujeto a ciertas condiciones y exclusiones, por un periodo de un año desde la fecha del envío del producto al comprador usuario original. Productos LED son garantizados por un periodo de 3 años desde la fecha de compra o del envío al comprador usuario original. Craftmade garantizará su producto solo si es vendido a través de un distribuidor autorizado Craftmade.

A su discreción, Craftmade reparará, reemplazará o hará ajustes apropiados cuando la inspección revele cualquier defecto que ocurra en el uso normal dentro del periodo de tiempo aplicable mencionado anteriormente, sujeto a las siguientes condiciones y exclusiones.

Los siguientes costos, desembolsos y perjuicios no están cubiertos por esta garantía limitada: (1.) costos laborales, incluyendo, pero no limitado a, costos asociados con quitar y reinstalar el Producto; (2.) gastos de envío y flete necesarios para devolver el Producto a Craftmade. Todas las garantías aplican solamente para el comprador usuario original y la instalación original de los Productos. **Esta garantía no es transferible.** Las cláusulas de esta garantía no aplican a productos que hayan sido destinados para uso comercial, usados con propósitos para lo que no están diseñados o destinados; que hayan sido sometidos a alteraciones, daño accidental, abuso, uso indebido, negligencia o accidente; que hayan sido almacenados, instalados, mantenidos u operados inapropiadamente; que hayan sido utilizados violando las instrucciones escritas proporcionadas por Craftmade; que hayan sido sujetos a temperaturas, humedad u otras condiciones ambientales inapropiadas; o que, basados en la revisión hecha por Craftmade, no revele a satisfacción de Craftmade conformidad con la garantía. Asimismo, esta garantía **NO CUBRE** rayones, abrasión, o deterioro debido al uso de pinturas, disolventes, químicos o técnicas de limpieza abrasivas.

Las garantías anteriores tampoco aplican si:

La factura original de venta, fecha de entrega, o el número del producto no pueden ser verificados.

Las partes consideradas defectuosas no se devuelven para su inspección si así lo solicita Craftmade.

El producto no está en posesión del comprador usuario original al momento de hacer el reclamo.

Para obtener Servicio de Garantía, por favor contacte a Craftmade a través de su Distribuidor de Iluminación, su Contratista de Iluminación o escribiendo a Craftmade,

At: Departamento de Servicio al Cliente, 3901 S. 20th Avenue, DFW Airport, TX 75261, o llamando al 800.486.4892.

Exclusiones de la Garantía:

usamos los mejores acabados resistentes a la intemperie, sin embargo, los acabados de lámparas instaladas en exteriores están sujetos a cambios debido a la exposición prolongada a la luz solar, contaminantes y otras condiciones ambientales. Cualquier reclamo por desvanecimiento, decoloración o "pátina" de un acabado en una lámpara para exteriores no es aplicable a la garantía anterior. Consulte las instrucciones de "Cuidado y limpieza de acabado" a continuación para obtener el cuidado y mantenimiento adecuados de su lámpara.

El medio ambiente dentro de diez millas de la costa del mar puede ser extremadamente corrosivo. Incluso con un mantenimiento adecuado, los productos instalados en este ambiente típicamente se deteriorarán más que los productos instalados en un entorno menos severo. Cierta corrosión y/o deterioro se considera "desgaste normal" en este ambiente. Cualquier reclamo por fallas de acabado o corrosión de otros componentes debido a condiciones del ambiente costero no aplica a la garantía anterior.

No podemos garantizar nuestros Báculos de anclaje sobre el suelo debido a problemas ambientales tales como humedad, acidez del suelo y otras condiciones corrosivas del suelo y del aire.

En Craftmade hacemos un gran esfuerzo para garantizar que los acabados de vidrio y metal que se muestran en nuestros catálogos coincidan con el producto real, pero las variaciones de acabado químico y acabados aplicados a mano pueden dar lugar a diferencias entre el producto real y las imágenes impresas.

Craftmade no autoriza a ninguna persona a crear obligación o responsabilidad en relación con sus Productos. La responsabilidad máxima está limitada al precio de compra original del producto. El Usuario original no podrá presentar ninguna demanda de incumplimiento de esta garantía por Craftmade, más de un (1) año después que la causa de la demanda ha surgido.

LAS GARANTÍAS IMPLÍCITAS, INCLUIDAS LAS DE COMERCIALIZACIÓN E IDONEIDAD DE UN FIN EN PARTICULAR, ESTÁN EXPRESAMENTE LIMITADAS A LA DURACIÓN DE ESTA GARANTÍA. CRAFTMADE Y/O EL VENDEDOR RECHAZAN CUALQUIER RESPONSABILIDAD POR DAÑOS ESPECIALES, INCIDENTALES O EMERGENTES.

Esta garantía le otorga derechos legales específicos y usted puede tener también otros derechos, que varían de estado a estado. Algunos estados no permiten limitaciones en daños incidentales o consecuentes, o cuanto dura una garantía, por lo tanto las limitaciones anteriores pueden no aplicar totalmente a usted. Consulte sus leyes locales para conocer sus derechos específicos bajo



CUIDADO & LIMPIEZA:

- Para evitar daños eléctricos, desenchufe el espejo antes de limpiarlo.
- Limpie solo el vidrio y el marco—**NO** toque los componentes eléctricos.
- Asegúrese de que el espejo esté completamente seco antes de volver a conectarlo a la corriente.
- Use un paño suave, seco y sin pelusa para la limpieza rutinaria.
- Si es necesario, humedezca ligeramente el paño con agua o un limpiador suave para vidrio.
- **NUNCA** rocíe el limpiador directamente sobre el espejo— aplíquelo primero al paño.

EVITAR:

- Productos químicos agresivos (como amoníaco, cloro, vinagre)
- Estropajos abrasivos o paños ásperos
- El exceso de humedad cerca de los bordes del espejo (para evitar daños de "borde negro").